



EP-2000 WAVEFORM CORRECTOR: P.O.E. PROTECTION


The **EP-2000** is the industry's most advanced power quality solution available. The patented circuit of the **EP-2000** uses innovative technology to increase the efficiency of an electrical distribution system, protecting the connected equipment that drives your process, from home automation to industrial robotics - and everything in between.

THE EP-2000:

ABSORBS, DISSIPATES & REMOVES

- Transient voltage surges and spikes
- Frequency Noise Between 3kHz-1MHz
- Ring waves

DOES NOT SHUNT ENERGY TO GROUND.
The facility ground is not relied on for performance or survivability.

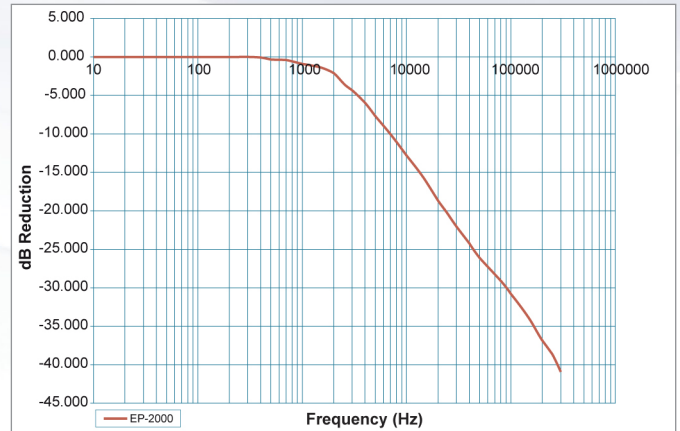

EP-2000 GENERAL SPECIFICATIONS

CIRCUIT DESCRIPTION	Internal Circuit Breaker	Spectrum Multiplier a	Voltage Limit Clamp (MOV) a	Low-Pass Filter a	Dissipative Absorber	(Parallel Operated)
---------------------	--------------------------	-----------------------	-----------------------------	-------------------	----------------------	---------------------

OPERATING FREQUENCY

45 - 65 Hz

FREQUENCY ATTENUATION

-20 dB/decade roll-off starting at 2.5 kHz

MAX SURGE CURRENT

12.5 kA per mode

MCOV

20% above rated voltage

SAFETY APPROVALS

UL 1449 3rd Edition TVSS Testing Type 2 SPD

CSA Standards Class 9091 01 & 9091 81; CSA std. c22.2 No. 8-M1986

SAFETY RATINGS

Fire Rating 94V-0

OPERATING ENVIRONMENT

Approximately -25° C to 65° C

RESPONSE TIME

Primary Response Time: Instantaneous Key Event Time: Approx. 1 Nanosecond

COMPLIANCE

NEMA LS-1, NEC Surge Suppression Standards, Electrical Notice 516

CONNECTION

Wire leads. Size: 14 AWG Length: 3'

MATERIALS

Aluminum Housing, LED Indicator Lamps, 14 AWG 600 V rated Wire.


Circuit encapsulated in epoxy to retain integrity of circuitry in failure mode.

ACCESSORIES

Amber LED indicates active phase

DIMENSIONS & WEIGHT

Diameter: 4.34" Depth: 3.35" Weight: 3 lbs. Compact for easy installation.

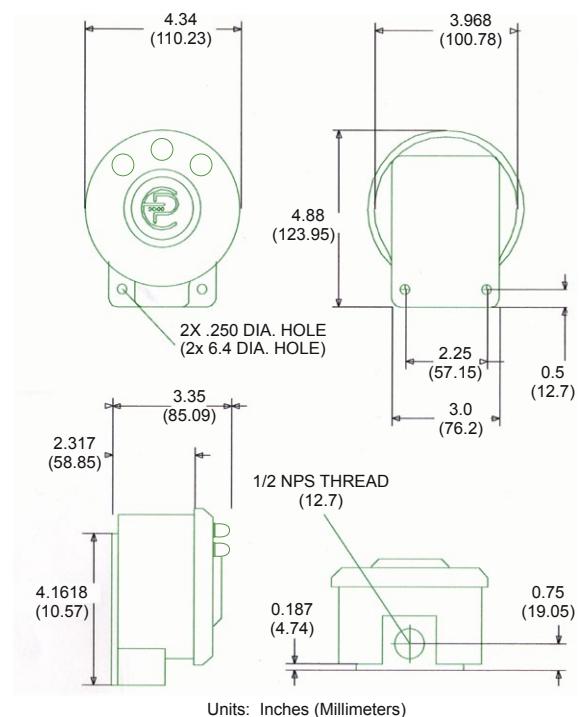

EP-2000 PRODUCT ORDERING GUIDELINES

MODEL NUMBER

EP



2	0	0	0	3Y208
---	---	---	---	-------

Series

 Voltage Configuration
ID#

VOLTAGE CONFIGURATIONS

SYSTEM VOLTAGE	PROTECT MODE	SYSTEM CONFIGURATION	VOLTAGE ID#	MCOV	SVR
Single Phase 100/200	L-N	3 Wire + G	1S100	130V	340V
Single Phase 120/240	L-N L-L	3 Wire + G	1S240	150 V 300 V	395 775
Single Leg 120V	L-N	2 Wire + G	1L120	150 V	395
Single Leg 240V	L-N	2 Wire + G	1L240	300 V	775
3 Phase 120/208	L-N L-L	4 Wire + G	3Y208	150 V 300 V	395
3 Phase 277/480	L-N L-L	4 Wire + G	3Y480	360 V 720 V	910
3 Phase 347/600	L-N L-L	4 Wire + G	3Y600	420 V 840 V	1120
3 Phase 120/240	L-N L-L	4 Wire + G High Leg	3H240	150 V 300 V	395 775
3 Phase 480V	L-L	3 Wire + G	3D480	575 V	1570

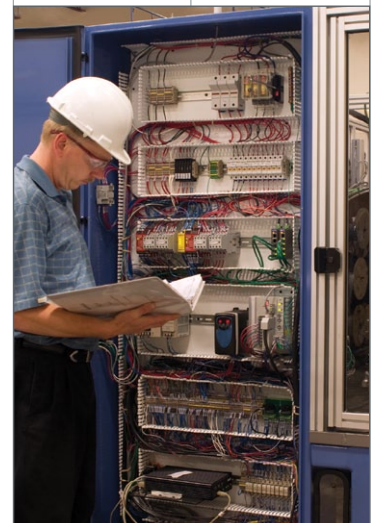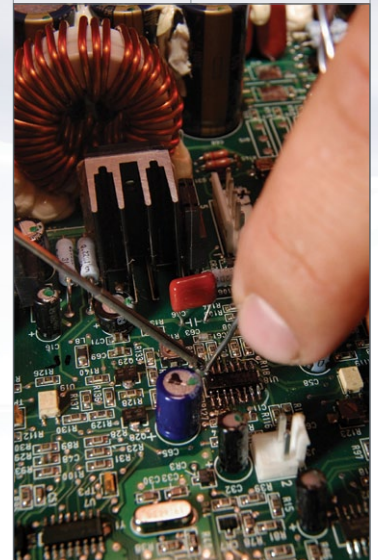

*Other voltages and configurations available upon request